


ABAB-50-28-002

Advantages:

- Middle size, Max. output achieve 123dB.
- Can be used in ITC or ITC

Mechanical data:

- Dimensions:

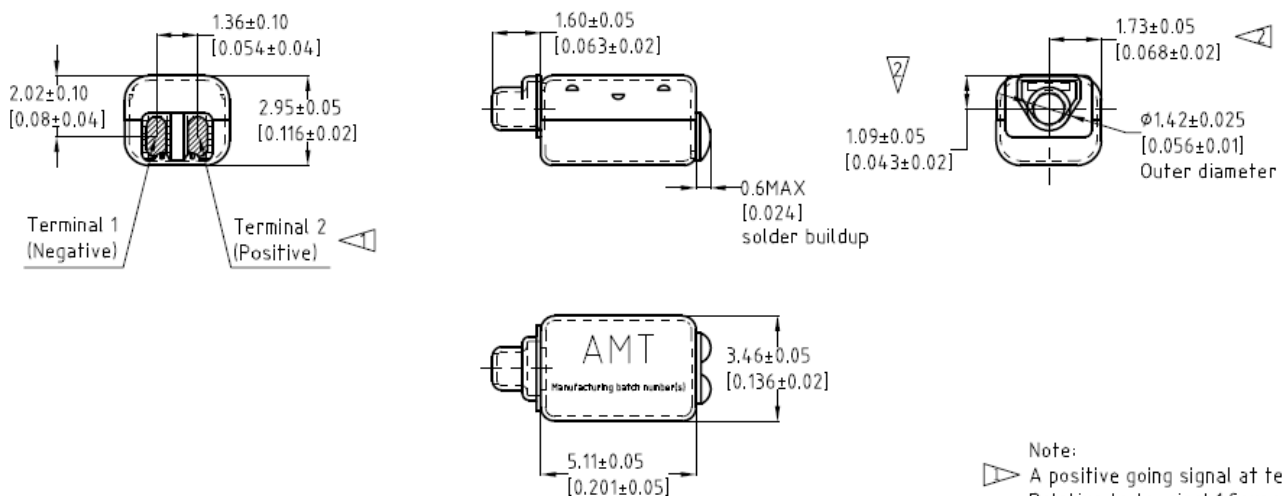

Note:

- ▶ A positive going signal at terminal 2, Relative to terminal 1, Cause an decrease in Pressure at the sound outlet.
- ▶ Located from to sufaces for customer convenience. Only applicable from one suface, Not to be used together.

- Port location: 12C
- Solder type: SAC305, and ROHS compliance

Electrical properties:

- Isolation: The case will be electrically isolated from internal coil
- DCR and impedance:

Item	specification
DC resistance	$28\Omega \pm 10\%$
Imp@1 kHz	$59\Omega \pm 15\%$

ABAB-50-28-002

Acoustic specification:


1, Test condition

1.1 Driver: CV 167mVrms

1.2 Tube and cavity: 10mm*dia1.0mm tube into 2CC coupler

1.3 Source requirements: source impedance <1ohm.

2, Typical response curve and specification:

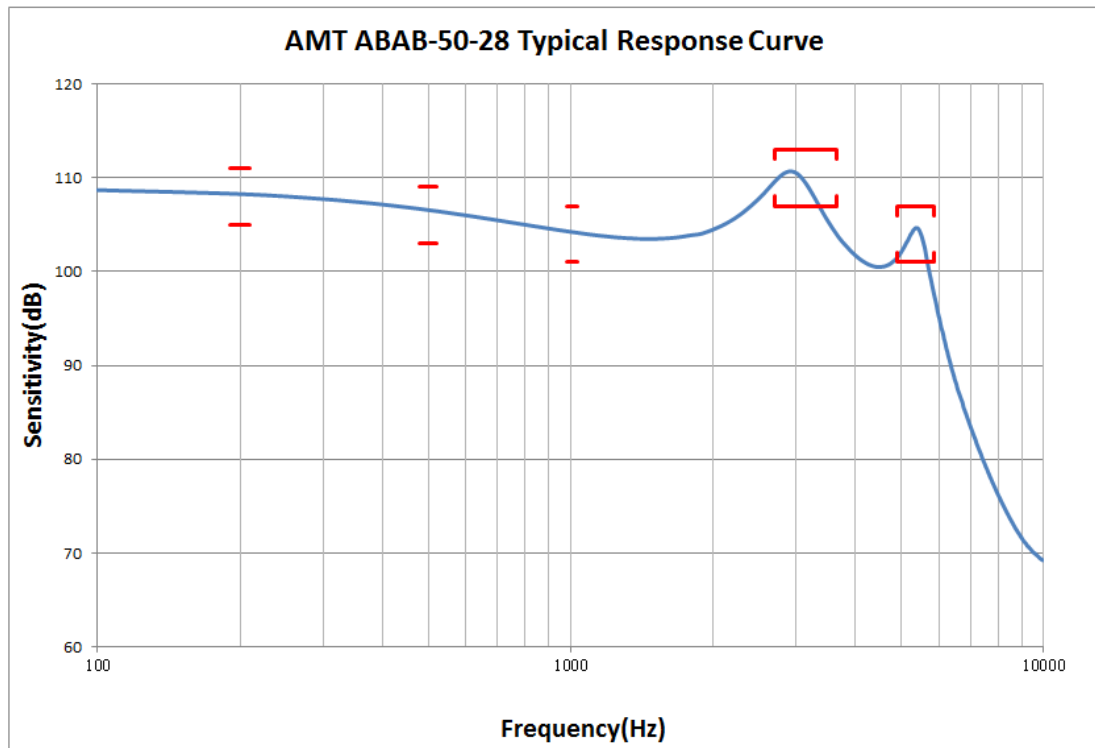

Specification	Frequency(Hz)	Minimum	Nominal	Maximum
Sensitivity	200	105	108	111
Sensitivity	500	103	106	109
Sensitivity	1000	101	104	107
Peak 1	2600-3200	107	110	113
Peak 2	4900-5900	101	104	107


3, Distortion specification:

Frequency(Hz)	Drive (Vrms)	Limit (%)
1/3 Peak 1	0.167	5%
1/2 Peak 1	0.167	5%

ABAB-50-28-002

Port location explanation:

- Example 12S, 12 indicates the port location, S indicates tube on the centerline, details refer to below:

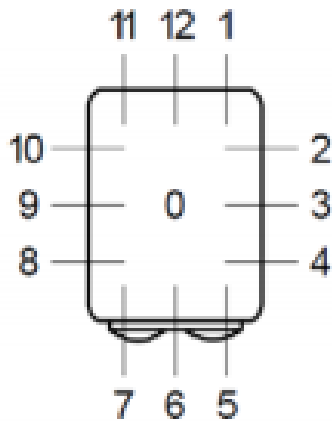

Port detail code:

N – no tube

B – tube away from the cover

C – tube near the cover

S – tube on the centerline

T – port on Top surface

O – other situation, check the drawing

Storage and operating requirements:

- Follow below table:

Item	Temperature (°C)	Humidity (%RH)	barometric pressure (hPa)
Storage	-40 ~ 63	10 ~ 60	500 ~ 1060
Operating/test	0 ~ 40	45 ~ 85	860 ~ 1060
Judgment	18 ~ 22	60 ~ 70	860 ~ 1060

Website: www.amtacoustic.com

Office Tel: (+86) 0519-81882133

Mail box: sales@amtacoustic.com

Address: No.7 Lanxiang Road economic development zone
Wujin district Changzhou City China